


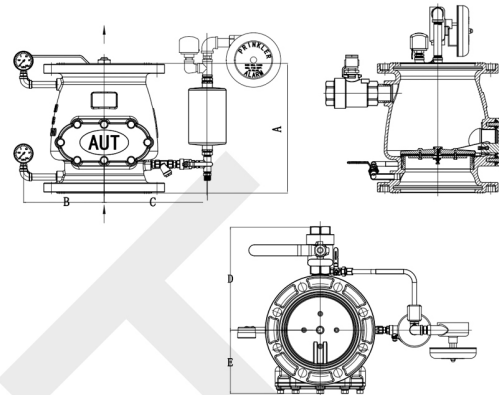

Parts

No.	Parts name	Material	Technical Information	
1	Disc Assembly	Stainless steel	Normal pressure	PN16
2	Valve seat	Stainless steel	Shell pressure	32 bars
3	Valve body	Ductile iron	Seat pressure	32 bars
4	Valve cover	Ductile iron	Max .Temp	80°C
5	Nameplate	Stainless steel		
6	Sealing gasket	NBR		
7	Rotation Axis	Stainless steel		

Designs

1	Flange drilled according to EN1092-2, PN16
2	Inspection and test according to EN12266
3	Internal and external coating by fusion bonded epoxy powder 250 micron thickness

Dimensions

Unit : mm

DN	A	B	C	D	E
80	250	182	240	170	140
100	250	182	265	170	140
125	300	210	280	220	160
150	300	210	280	220	160
200	350	240	315	240	180
250	436	290	340	350	245

GPRO VALVE SDN BHD (1236889-K)

11A Jaian USJ1/31, 47600 Subang Jaya, Selangor, Malaysia

Phone: (+60)-3-8023-6900 / Fax: (+60)-3-8023-7800

Website: www.gprovalve.com.my